



# BW-BWS Weighing Indicator

## ► FEATURES



- Easy to use - front panel configuration
- 52mm LCD display, with white color LED backlight
- Battery provide up to 90 hours of continuous use.
- Keyboard lock function
- Function include tare, accumulation, check weighting, net/gross shift, counting, weighing units conversion
- OIML approve/ EC type approve / model selectable(T7393)

## ► OPTIONS

- RS-232 interface
- Analog output (0-10V /4-20mA)
- Setpoint output(HI/OK /LOW /BEEP )
- Blue tooth



## ► DIMENSION (Inch)

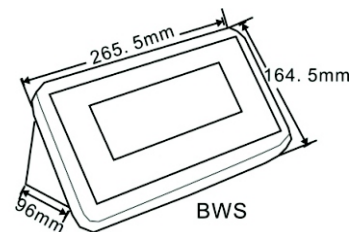

## ► SPECIFICATIONS

Model	BW-M		BWS-M	
Display	52mm LCD		52mm LCD	
Operate temp	0°C~+40°C			
ADC	sigma delta			
ADC update	≤ 1/10 second			
External resolution	1/30,00e (OIML/EC type approval)			
Max. Divisions	30,000d			
Keypad	7 keys			
Power	AC adapter (9V/800mA) rechargeable battery		(6V/4Ah)	
Platform size	23.6"X23.6"		31.5"x31.5"	
Load cell excitation Voltage	5V/150mA			
Gross weight	1.6kg	1.5kg	2.0kg	1.9kg
Load cell(max)	4x350ohms			
Housing	ABS plastic		SST	
Packing	Master carton 4 in 1 packing, dimension 0.129m <sup>3</sup> , 40 feet container can load 1800 machine, 20 feet container can load 900 machine			